


D40R / D40P Non-contact Door Switches

2 new series of non-contact door switches with long life solid state outputs that connect to most 2NC input safety monitoring devices

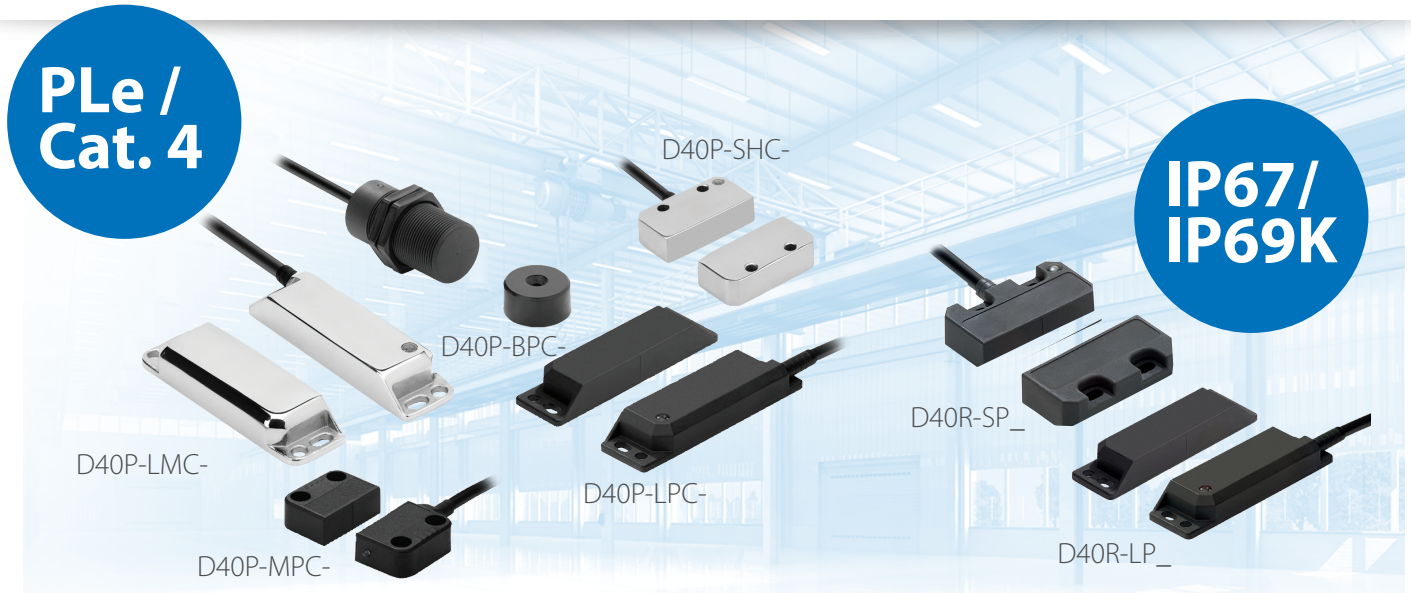

*Not all models shown

D40P Series

Hall effect technology provides solid state outputs for increased longevity versus reed style output or conventional keyed door switches.

- All Stainless steel versions have mirror polish surfaces
- Special food types have rear mounting holes suitable for food contact zones

D40R Series


RFID technology provides increased tamper resistance versus conventional keyed door switches and coded magnetic door switches.

- Basic (single) or unique (up to 32,000,000) coding available

Connection Accessories

Ease of use and faster installation a variety of M12 connection accessories that provide quick connect options including a T-tap allowing for up to 20 sensors to be connected in series (up to PLd / Cat. 3).



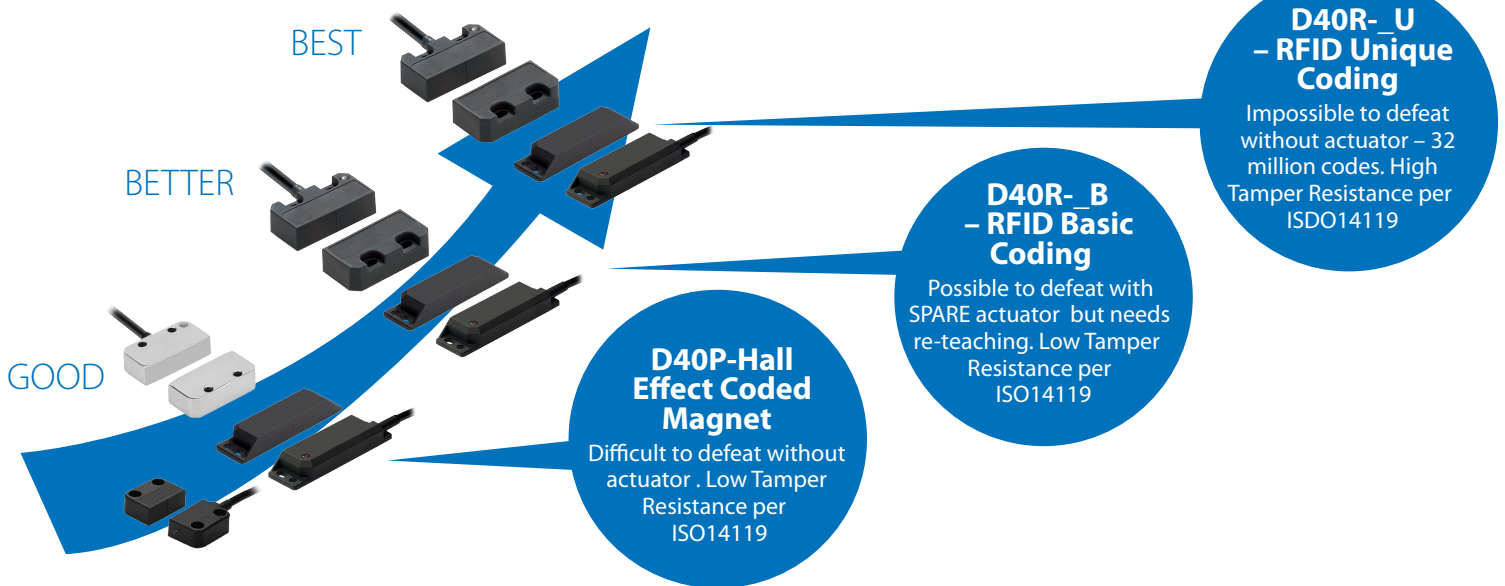

		D40P	D40R_B	D40R_U	Accessories*
Long (Plastic)	5M Cable	D40P-LPC-21-05	D40R-LPB-21-05	D40R-LPU-21-05	----
	10M Cable	D40P-LPC-21-10	D40R-LPB-21-10	D40R-LPU-21-10	----
	M12 with 250mm Cable	D40P-LPC-21-M12	D40R-LPB-21-M12	D40R-LPU-21-M12	----
Small (Plastic)	5M Cable	D40P-SPC-21-05	D40R-SPB-21-05	D40R-SPU-21-05	----
	10M Cable	D40P-SPC-21-10	D40R-SPB-21-10	D40R-SPU-21-10	----
	M12 with 250mm Cable	D40P-SPC-21-M12	D40R-SPB-21-M12	D40R-SPU-21-M12	----
Mini	5M Cable - Left	D40P-MPC-21-05-L	N/A	N/A	----
	5M Cable -Right	D40P-MPC-21-05-R	N/A	N/A	----
Barrel	5M Cable	D40P-BPC-21-05	N/A	N/A	----
Long SUS	5M Cable	D40P-LMC-21-05	N/A	N/A	----
Small SUS	5M Cable	D40P-SMC-21-05	N/A	N/A	----
	M12 with 250mm Cable	D40P-SMC-21-M12	N/A	N/A	----
Small Hygienic	5M Cable	D40P-SHC-21-05	N/A	N/A	----
Mini Hygienic	5M Cable - Left	D40P-MHC-21-05-L	N/A	N/A	----
	5M Cable -Right	D40P-MHC-21-05-R	N/A	N/A	----
Small Special Food Type	5M Cable	D40P-SFC-21-05	N/A	N/A	----
Accessories*	Single Ended 5M Cable	----	----	----	D40ML-CBL-M12-5M
	Single Ended 10M Cable	----	----	----	D40ML-CBL-M12-10M
	Double-Ended 2M Cable	----	----	----	D40P-8PMF-M12-02M
	Double-Ended 5M Cable	----	----	----	D40P-8PMF-M12-05M
	Double-Ended 10M Cable	----	----	----	D40P-8PMF-M12-10M
	Shorting Plug	----	----	----	D40P-8PSP-M12
	T-Tap Cable	----	----	----	D40P-8PTC-M12

*Suitable for use with both D40P and D40R sensors.

OMRON AUTOMATION AMERICAS HEADQUARTERS • Chicago, IL USA • 847.843.7900 • 800.556.6766 • www.omron247.com

OMRON CANADA, INC. • HEAD OFFICE
Toronto, ON, Canada • 416.286.6465 • 866.986.6766 • www.omron247.com

OMRON ELECTRONICS DE MEXICO • HEAD OFFICE
México DF • 52.55.59.01.43.00 • 01-800-226-6766 • mela@omron.com

OMRON ELECTRONICS DE MEXICO • SALES OFFICE
Apodaca, N.L. • 52.81.11.56.99.20 • 01-800-226-6766 • mela@omron.com

OMRON ELETRÔNICA DO BRASIL LTDA • HEAD OFFICE
São Paulo, SP, Brasil • 55.11.2101.6300 • www.omron.com.br

OMRON ARGENTINA • SALES OFFICE
Cono Sur • 54.11.4783.5300

OMRON CHILE • SALES OFFICE
Santiago • 56.9.9917.3920

OTHER OMRON LATIN AMERICA SALES
54.11.4783.5300